

PALLET & CARGO  
X-RAY IMAGING SYSTEM

# XRC 180-180DV (200kV)



**American Transportation Security Administration (TSA) ACSTL** qualified x-ray scanner, **180-180DV** provides excellent performance thanks to its **200kV** generator and manufactured with dual view (DV) technology. Thanks to its 2 generator sources, it provides high resolution and detailed imaging in horizontal and vertical angles. The visuals can be accessed with a single scan without the need to re-place the packages in a different orientation. Thus, hidden objects in the luggage are detected more easily and quickly.

The device itself facilitates the operators use thanks to the various image processing functions, hazard alarm, advanced computer technology and the best in class software. It provides exceptional ease in detecting threats such as cutting tools, explosives narcotics and minimizes the error rate. It offers unique image quality by showing the scanned organic, inorganic and mixed items in different colors thanks to its multi-diode structure and quality in imaging of scanned objects.

It is designed with the latest technology to scan medium and large packages on a pallet in detail and provides the ideal solution for locations where security screening is required in high security facilities such as freight companies, terminals, airports, customs and general cargo .

# TECHNICAL DATA XRC 180-180DV (200kV)

## PHYSICAL PROPERTIES

Tunnel Size	: 1820 mm x 1810 mm
(W x H)	: 71,65 in x 71,26 in
Dimensions	: 8580 mm x 3015 mm x 2785 mm
(L x H x W)	: 337,80 in x 118,70 in x 109,65 in
Approx. Weight Unpacked	: ~6800 kg (14991 lbs.)
Conveyor Height	: 385 mm (15,16 in)
Conveyor Load Capacity	: 3000 kg (6614 lbs.) Evenly Distributed
System Power	: 110/220V AC $\pm$ 10% 50/60 Hz , 12amp max.
Conveyor Speed	: 0,20 m/sec. Forward or Reverse

## X-RAY GENERATOR & IMAGE PERFORMANCE

Steel Penetration <sup>1</sup>	: 50 mm guaranteed; 52 mm typical
Wire Resolution <sup>1</sup>	: 36 AWG guaranteed; 38 AWG typical
Anode Voltage	: 200kV, operating at 200kV
Tube Current	: 1,2 mA
Beam Direction	1st Generator : Vertically downward 2nd Generator : Horizontally sideward
Article Separation	: Low Z, Medium Z, High Z to 0,5 Z Accuracy; Organic, InOrganic, Metallic
Cooling	: Oil and forced air cooling

## COMPUTER SPECIFICATIONS

Processor	: Intel® Core™ i5 (or superior)
Monitor	: Dual 21,5" Flat Panel Full HD Monitor 1920x1080 Resolution, 24 Bit Color
Memory	: 4 GB RAM (or superior)
Video Card	: 2 GB (or superior)
Hard Drive	: 1 TB (or superior)
USB Port	: 6 port (or superior)
Operating System	: Linux

## OPERATING ENVIRONMENT

Storage / Operating Temperature	: -20°C to 60°C / 0°C to 40°C (-4°F to 140°F / 32°F to 104°F)
Relative Humidity	: 5% to 95% non-condensing
Duty Cycle 100% (24 Hours), No warm-up required	

## STANDARD FEATURES

Programmable Function Keys  
 Parcel Counter  
 Date and Time Display  
 Virtual Threat Image Projection (TIP)  
 Organic/Inorganic Threat Alarm  
 Operator Training Program (OTP)  
 UPS (For Computer Supply)  
 Multi Languages  
 Self Diagnosis  
 Generator Timer  
 Bi-Directional Scanning  
 Automatic Stop Conveyor  
 Motorized Input / Output Rollers  
 Emergency Stop

## HEALTH AND SAFETY

All X-Ray Center Ltd products meet all applicable international health and safety regulations.

Safety Interlock Switches: To protect against radiation hazards In case of opening the sensitive lids of the machine, there are Safety Interlock Switches to prevent radiation leakage.

Made of strong materials and durable to scratch and rust.

US FDA Federal Standard 21CFR 1020.40

Health and Safety at Work Act 1974-compliant 6 : Available

Film Safety : ISO 1600 / 33 DIN

CE Compliance : Certified

FCC & IEC Compatibility : Available

IP 20 Safety : Certified

Maximum level of radiation the exterior panels come in contact with is 0.1 mR/hour

## OPTIONAL FEATURES


Barcode Reader System  
 External Camera Archiving  
 Remote Viewing Station  
 Recheck Station  
 Network Supervisory System (NSS)  
 Remote Access Connection  
 Smart Card Login

## STANDARD IMAGE PROCESSING FEATURES

Perfect View (Detail Enhancement) (PV)  
 Edge Enhancement (EE)  
 Pseudo Color (PS)  
 Organic Materials (OM)  
 Inorganic Materials (IM)  
 Black & White (B/W)  
 Inverse Colors (IN)  
 High Penetration (HP)  
 Variable Edge Enhancement (+E -E)  
 Variable Density (+D -D)  
 Variable Gamma (+G -G)  
 Variable Color Separation (+C -C)  
 Zoom (64x)  
 Sniper Zoom  
 Recall Previous Images (100,000 or superior)  
 Manual/Automatic Archive (100,000 or superior)  
 Annotated Archive  
 Multi Energy Viewer (4 - 6 Color)  
 Atomic Number Display (Z Value)

## OPTIONAL ACCESSORIES

External UPS (For system)  
 Operator Console (Open-Closed/Adjustable/I-stand)  
 21,5" - 27" Flat Monitor  
 Input / Output Rollers  
 Test Kit (STP/ASTM)  
 Protective Cover  
 Search Table  
 Tray Return System (Motorized/Gravity)  
 Inclined Conveyor  
 Ultrasonic Rat Repellent  
 Radiation Meter

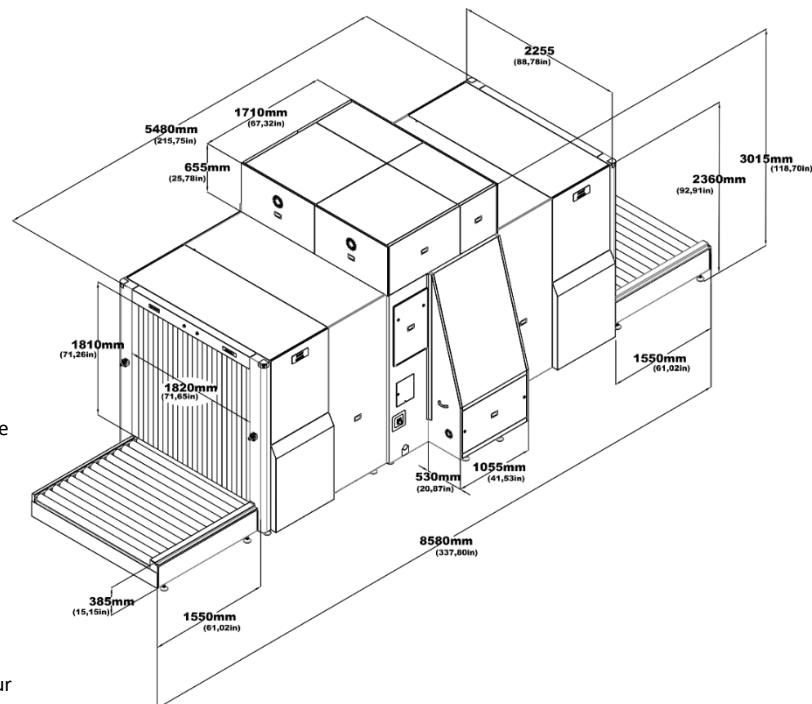

<sup>1</sup>As tested on X-Ray Center Ltd. test piece. Conveyor speed is 0.20 m/sec.

Products certified as TSA, ECAC and so on are available as an option. Please inquire from your dealer.

Due to continuous product development, X-Ray Center reserves the right to change specifications without notice.

